



12W C-Band Block Up Converter

KEY FEATURES


- ◆ Small package size and weight
- ◆ Feed horn mounting
- ◆ “No cooling fan” solution
- ◆ Input side connector
- ◆ Powered through IF cable option
- ◆ Low power consumption (<79W)
- ◆ High power efficiency (12W min @P1dB over temperature)
- ◆ 24VDC / 48VDC / 48VDC via MS connector input power options
- ◆ Standard, Palapa and Extended C-Band options
- ◆ RoHS compliant
- ◆ Three-year warranty

ABA12C / ABA12CF ABA12CP / ABA12CPF ABA12CE / ABA12CEF



This small and light weight 12W L-To C-Band Block Up Converter is designed to be mounted on the feed horn. High power efficiency resulting in low current consumption allows user to pass DC supply voltage via IF cable. The unit is ideal for network and point to point, data distribution, portable and emergency applications.

Mechanical Drawing

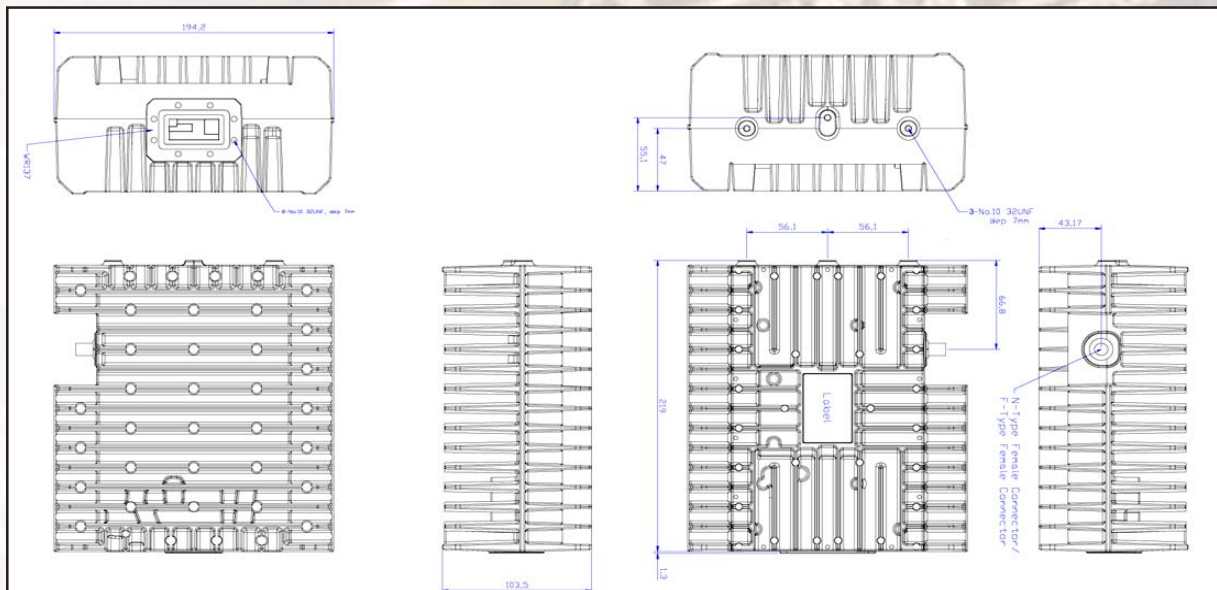



12W C-Band Block Up Converter

| TECHNICAL SPECIFICATIONS | | |
|---|---|--|
| RF frequency | ABA12C ABA12CP ABA12CE | 5.850 to 6.425 GHz 6.425 to 6.725 GHz 6.725 to 7.025 GHz |
| Local oscillator | ABA12C ABA12CP ABA12CE | 4.90 GHz, non-inverting 5.275 GHz, non-inverting 5.75 GHz, non-inverting |
| IF frequency | ABA12C ABA12CP ABA12CE | 950 to 1.525 MHz 1.150 to 1.450 MHz 975 to 1.275 MHz |
| Output power @ P1dB min over temp. | | 12W (+41 dBm min.) |
| IF connector | | N-type or F-type |
| Power supply | ABA12C ABB12C ABC12C | +18 VDC~+24 VDC via IF cable 79 W max +36 VDC~+60 VDC via IF cable 77 W max +36 VDC~+60 VDC via MS conn. 77 W max |
| Output interface | | CPR-137 Grooved |
| Linear gain | | 54 dB min., 64 dB nominal |
| Gain variation | over 50 MHz over 575 MHz | 0.7 dB p_p 2.0 dB p_p |
| Over operating temperature | | 2.2 dB p_p @ fixed frequency |
| Requirement for external reference | | via IF cable |
| | frequency | 10 MHz (sine-wave) |
| | input power | -5 to +5 dBm @ input port |
| Phase noise | | -53 dBc/Hz max. @ 10 Hz -63 dBc/Hz max. @ 100 Hz -73 dBc/Hz max. @ 1 kHz -83 dBc/Hz max. @ 10 kHz -93 dBc/Hz max. @ 100 kHz -110 dBc/Hz max @ 1 MHz |
| Noise figure | | 20 dB max |
| Input V.S.W.R. | | 2 : 1 max |
| Output V.S.W.R. | | 2 : 1 max. |
| Mute | | Shut off the BUC in case of L.O. unlocked |
| Input interface | ABA12C ABA12CF | 50 Ohm (N-type IF in) 75 Ohm (F-type IF in) |
| Temperature range (ambient) | | |
| | operating | -40 deg C to +55 deg C |
| | storage | -40 deg C to +75 deg C |
| Dimensions & housing | | 217 (L) x 194 (W) x 103 (H) mm 8.7" (L) x 7.7" (W) x 4.1" (H) |
| Weight | | 4.2 kg (9.3 lbs) max |